

Evo 2L

Evo 2L is the mid-bass addition for the Evo 2, increasing headroom and enabling the full output capacity of the mid-high elements.

An intuitive coupling mechanism enables quick and safe attachment of an Evo 2L to the top or bottom of an Evo 2. Once connected, the assembly can be lifted by the Evo 2's Butterfly Plate (BFP-2) as normal.

Pairs of Evo 2 and Evo 2L can be flown together to form an extremely powerful system which is suitable for medium sized live music venues and clubs. A foam backed grille can be added for a more discreet appearance.



Features:


- Increases the usable headroom of an Evo 2
- · Safe and intuitive coupling mechanism
- Foam backed grille available for discreet appearance
- BFP-2 compatibility
- Install version available (does not include coupling mechanism)
- 15mm Baltic birch ply construction


Frequency Response: 85Hz - 28OHz
Low Frequency Response (-10dB): 6OHz
Weight: 21kg (46.3lbs)
Nominal Dispersion: Array Dependant
Connectors: 2 x Neutrik NLT4M or NLT8M


Driver	Crossover Frequencies	Sensitivity (at 1m)*	Power (AES)	Nominal Impedance
12" (LF)	85Hz - 280Hz	100dB at 2.8V	600W	8Ω


^{*}Measured in free field

Specific crossover settings can be found at www.funktion-one.com/support

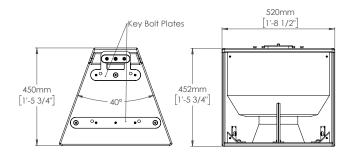







Install version

Dimensions in Metric and Imperial

Specifications may be subject to change without notice

DO075-01