


Evo 7TL

Evolution 7TL features two Evo 7T horn-loaded 15" drivers. It provides mid-bass reinforcement for flown and ground-stacked Evo configurations.

The addition of the Evo 7TL and Evo 7TH to the Evo 7T series makes Evo configurations eminently scalable.

Evo 7T, 7TH and 7TL all share the same integrated flying system for fast, accurate and effective rigging. The increase in scalability that comes with the addition of the Evo 7TH and 7TL make Evo configurations comfortable in delivering precise and even coverage to audiences of up to 10,000 people.

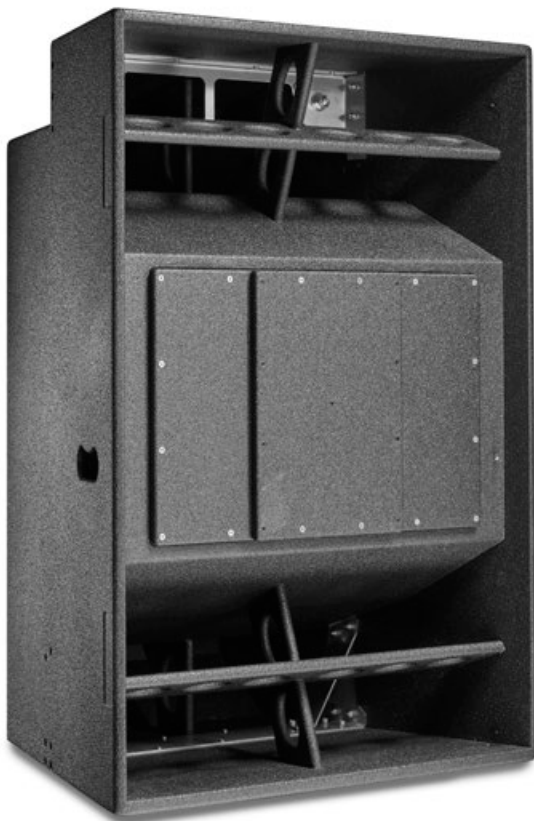

Features:


- Fully horn loaded for high efficiency
- Advanced loudspeaker design
- Integrated flying and ground-stack system
- 2-wide and 3-wide flying grids
- Low weight Neodymium magnets throughout
- Optional wheelboard
- Optional sturdy grille for discreet appearance
- 7T and 7TH variants for maximum flexibility in deployment

Frequency Response (-3dB): 70Hz - 300Hz
 Weight (without wheelboard): 61kg (135lbs)
 Nominal Dispersion: Array dependant
 Connectors: 2 x Neutrik NL8

Driver	Crossover Frequencies	Sensitivity (at 1m)*	Power (AES)	Nominal Impedance
2 x 15"	85Hz - 220Hz	102dB at 2V	2 x 400W	2 x 8Ω

*Measured in free field

Specific crossover settings can be found at www.funktion-one.com/support

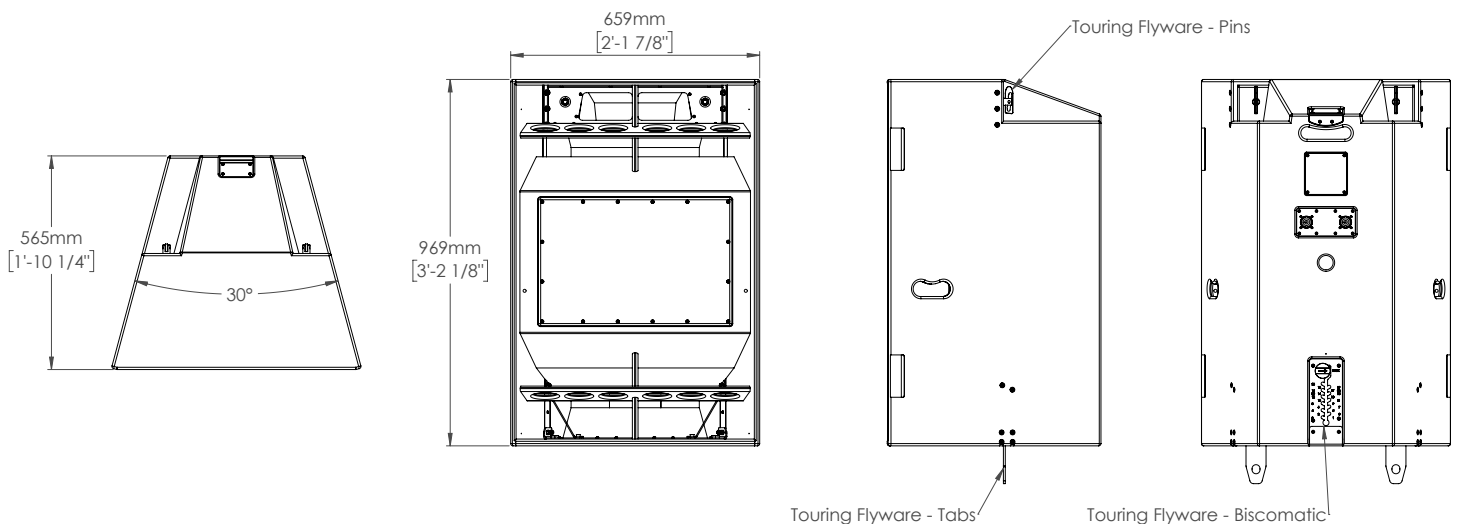

Dimensions in Metric and Imperial

D0013-01