

F61


F61 brings an outstanding level of performance to a wide range of applications, including music venues, hospitality, fashion, galleries, studio reference and domestic use.

Following the same design principles as the popular F81.2 and F101.2, the F61 sits between the F5.2 and F81.2 in the Funktion-One Compact Range. It achieves very low distortion and excellent integration between drivers for stable and engaging imaging.

In addition to being a very useful installation speaker, F61 combines with SB8A or SB10A self-powered bass as an impressive standalone system.

Features:

- Dual NL4 and Phoenix connector combination as standard
- Various mounting/rigging options (yoke, wall bracket)
- M6 rigging points
- Weather resistant and IP55 rated versions available

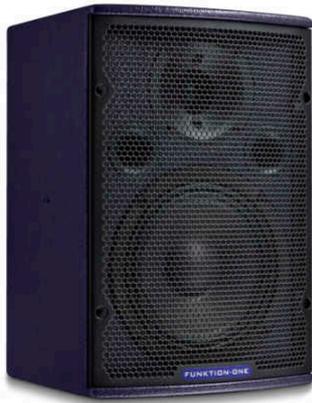

| | |
|---------------------------------|-------------------------------|
| Frequency Response: | 100Hz - 20kHz |
| Low Frequency Response (-10dB): | 60Hz |
| Weight: | 5.25kg (11.5lbs) |
| Nominal Dispersion: | 90° Horizontal x 60° Vertical |
| Connectors: | 2 x Neutrik NL4 and Phoenix |

| Driver | Crossover Frequencies | Sensitivity (at 1m)* | Power (AES) | Nominal Impedance |
|---------|-----------------------|----------------------|-------------|-------------------|
| 6" + 1" | 110Hz - up | 92dB at 4.9V | 100W | 16Ω |

*Measured in free field

Specific crossover settings can be found at www.funktion-one.com/support

